


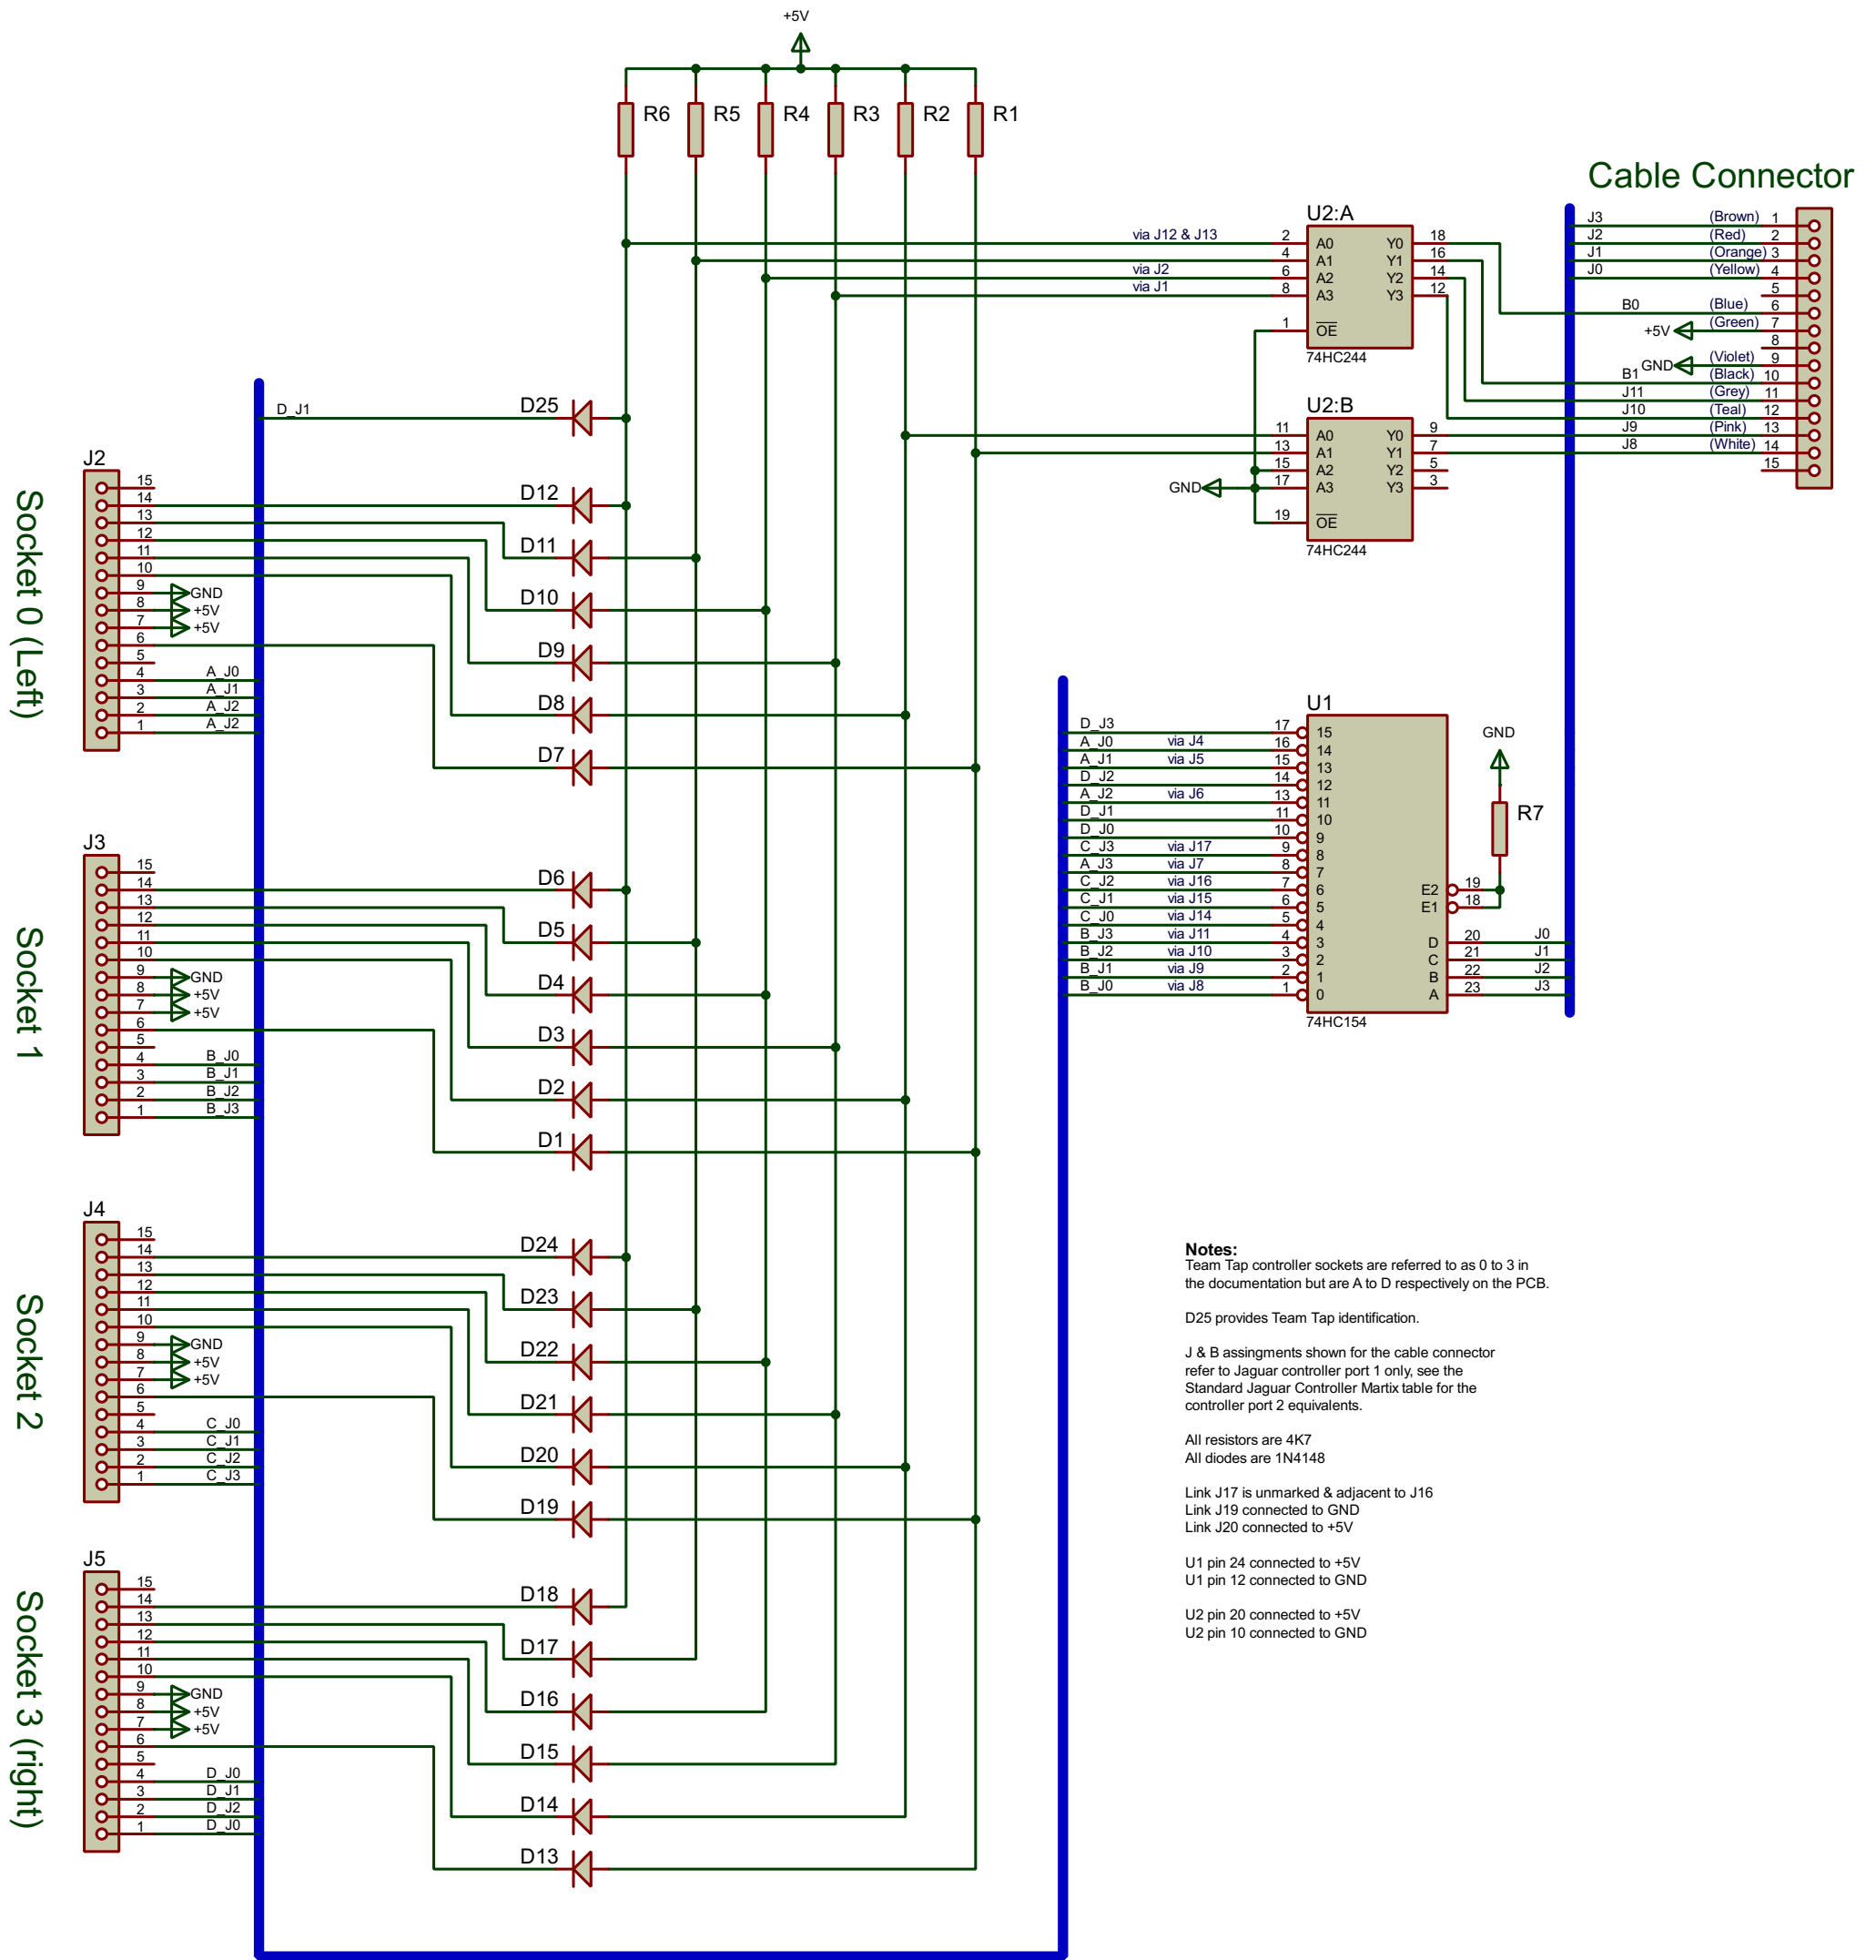

Notes:
Team Tap controller sockets are referred to as 0 to 3 in the documentation but are A to D respectively on the PCB.

D25 provides Team Tap identification.

J & B assignments shown for the cable connector refer to Jaguar controller port 1 only, see the Standard Jaguar Controller Matrix table for the controller port 2 equivalents.

All resistors are 4K7
All diodes are 1N4148

Link J17 is unmarked & adjacent to J16
Link J19 connected to GND
Link J20 connected to +5V

U1 pin 24 connected to +5V
U1 pin 12 connected to GND

U2 pin 20 connected to +5V
U2 pin 10 connected to GND